





FIETSHANGAR

COLLECTIVE URBAN BIKE STATIONS



Easy use gas spring balanced door

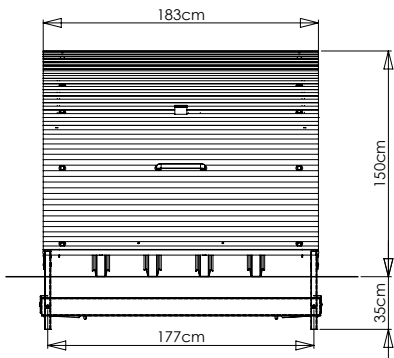

Type 1.8 (4 bikes)

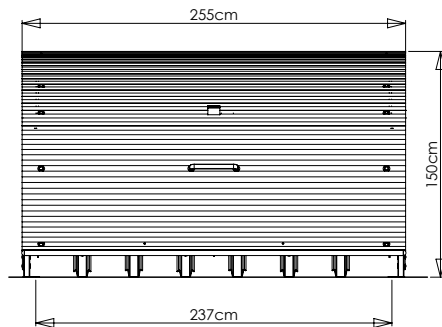

Type 2.5 (6 bikes)

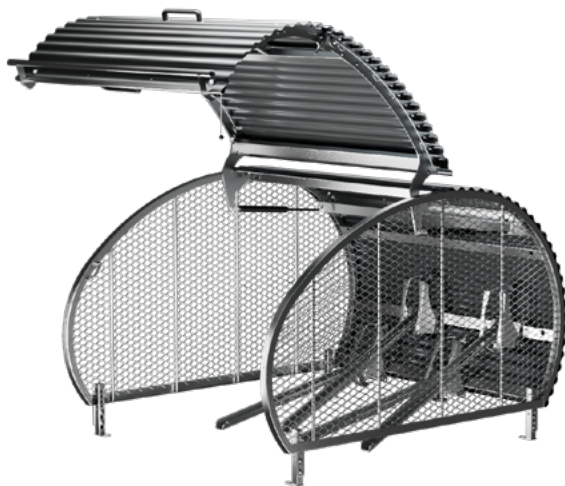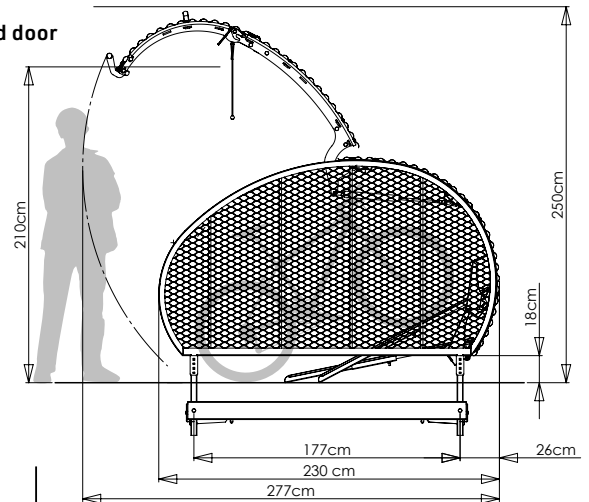


- Type 1.8 (4 bikes) 1,83 x 2,30 x 1,50 m
- **Type 2.5 (6 bikes) 2,55 x 2,30 x 1,50 m**
- Solid 2-point latching lock
- **Reliable mechanical or electronic lockingsystem**
- Hot-dip galvanized steel
- **Powder coated in any RAL colour**
- Sendzimir galvanised corrugated sheets
- **Easy installation + flexible relocation**
- Modular, refurbishable and circular
- **Sustainable, low maintainance**
- Patented high-low bicycle racks
- **Charging points for electric bikes**
- 8-12 weeks delivery time & installation
- **At least 25 years technical lifespan**



Charging facility with light fixtures



Interior handle

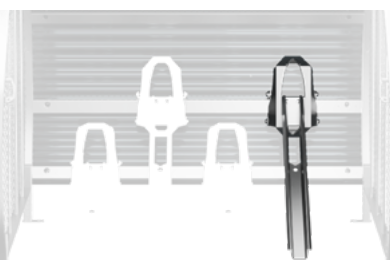

Bicycle parking module



Lock hitching bar serving 2 bikes



Ground frame for embedded foundation in soft and paved surface or adjustable mounting feet for anchoring to concrete or asphalt



The door is secured with a solid 2-point latching lock in combination with a variety of cylinder lock options, such as digital cylinders with tags/keyfobs or smartphone.

